


TT-FLAT-PROBE



RAYCHEM
TraceTek

WATER LEAK DETECTION PROBE

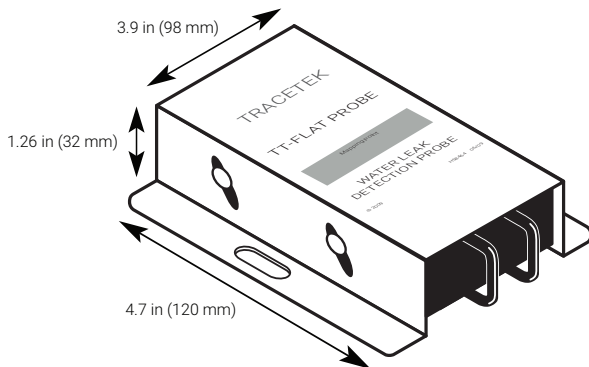

PRODUCT OVERVIEW

The nVent RAYCHEM TraceTek TT flat probe designed to detect water leaks in specific locations. It is intended to be floor or tray mounted, using either screw or adhesive attachment. The unit has an orange color to promote visibility in the installed location.

The TT-FLAT PROBE can detect water leaks in low spots, drip trays or sumps, where TraceTek sensing cables are inappropriate. The TT-FLAT PROBE is designed to be integrated as a part of a larger TraceTek leak detection system.

When mounted on a metal surface (e.g. a drip pan) and with sensor tip height adjusted very close to floor surface, minimum water depths of approximately 0.2 in (5 mm) may be required for leak detection. If the TT-FLAT PROBE is mounted on an insulating surface, minimum water depths of approximately 0.5 in (12.7 mm) may be required for leak detection.

The TT-FLAT PROBE can be interconnected with jumper cable to other TT-FLAT PROBE or TraceTek sensing cable segments, and be monitored by a TraceTek TTDM-128 or TT-SIM module.


Simple and easy to use

The TT-FLAT PROBE is compatible with all TraceTek 1000 system components.

Leak detection system design is very flexible with the TT-FLAT PROBE and TraceTek leak detection cable.

The illustration below shows several possible leak detection circuits constructed from the TT-FLAT PROBE and TraceTek leak detection cable being monitored by a TraceTek TTDM-128 and TT-SIM modules.

POTENTIAL CONFIGURATION EXAMPLE

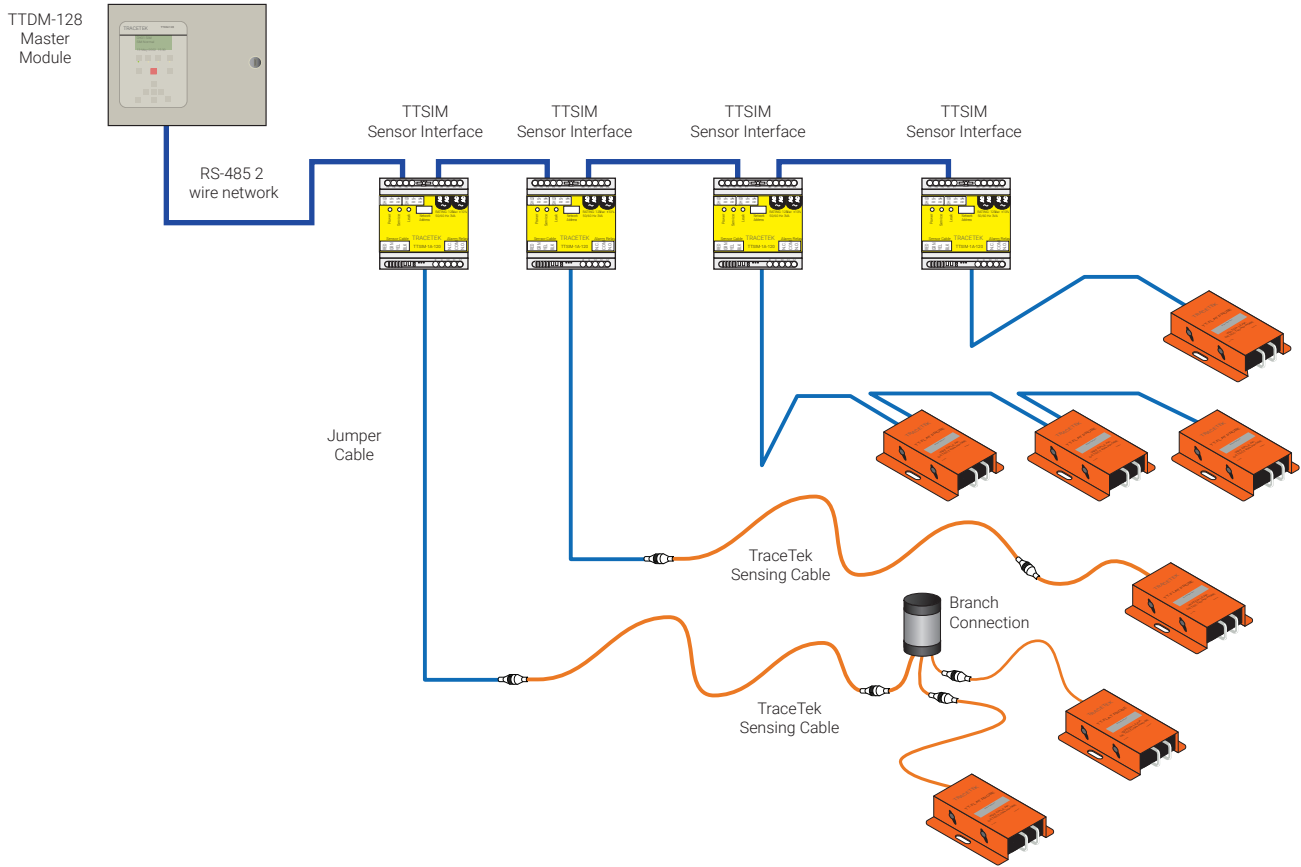

ORDERING INFORMATION

Catalog number	P/N	Description
TT-FLAT PROBE	P000001074	Water leak detection probe

PRODUCT CHARACTERISTICS

Dimensions	4.7 in L x 3.8 in W x 1.3 in H (120 mm L x 98 mm W x 32 mm H)
Weight	0.4 lb nominal
Shroud	Epoxy coated aluminum, orange
Probes	316 Stainless steel
Probe height above mounting surface	Adjustable
Housing	Black PVC
Maximum ambient temperature	122°F (50°C)
Minimum ambient temperature	32°F (0°C)
Connections	4-wire TraceTek jumper cable to terminal strip
Minimum water depth to trigger leak	0.2 in (5 mm) on metal surface*
Minimum water depth to trigger leak	0.5 in (12.7 mm) on insulating surface*

* With sensor tip height close to mounting surface but not touching

North America

Tel +1.800.545.6258
Fax +1.800.527.5703
thermal.info@nvent.com

Europe, Middle East, Africa

Tel +32.16.213.511
Fax +32.16.213.604
thermal.info@nvent.com

Asia Pacific

Tel +86.21.2412.1688
Fax +86.21.5426.3167
cn.thermal.info@nvent.com

Latin America

Tel +1.713.868.4800
Fax +1.713.868.2333
thermal.info@nvent.com



nVent.com

Our powerful portfolio of brands:

CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER